


MIL-STAR™

GS27500 MULTI-CONDUCTOR CABLE

Glenair MIL-STAR multi-conductor 27500 type cables are built from in-house manufactured GS22759 hookup wire, available with industry qualification as well as Glenair GS signature part numbering. GS27500 constructions for shielded and unshielded cable are:

- Made and tested IAW ANSI/NEMA WC 27500
- 1-15 22759 primary hook-up wires
- Insulation types including crosslinked ETFE
- Industry-standard and Glenair signature shielding materials
- Standard and signature jacket compounds

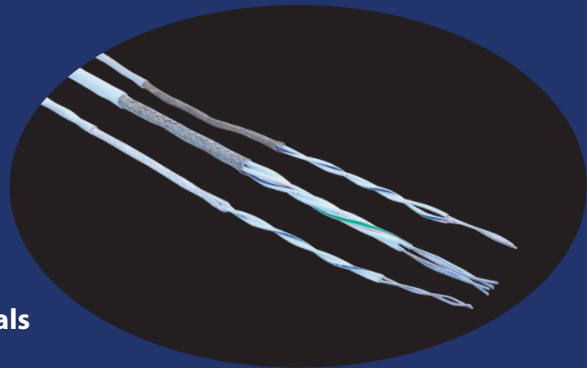


MIL-STAR™ 27500 MULTI-CONDUCTOR CABLES

ANSI/NEMA WC 27500 and Glenair signature multi-conductor cables. Each series supports M22759-16 thru -46 wire types with wire count, gauge, shield, and jacket options as allowed.

968-001-24SC2AR09


- 27500 type with ArmorLite or AmberStrand lightweight microfilament braided shielding

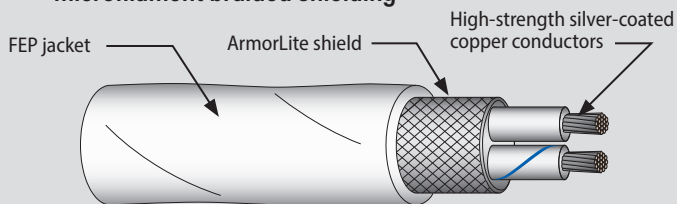

MIL-STAR GS27500 cables may be specified with signature braided shielding including ArmorLite, ArmorLite CF, and AmberStrand. The ability to supply 27500 type cable in accordance with the ANSI/NEMA standard but optimized for SWaP with lighter weight ArmorLite and AmberStrand shielding is a unique Glenair-only capability.

GS27500-22TF4T14


- 27500 type with GS22759-17 wire (silver-plated high-strength copper wire, ETFE insulation), and TC shielding.

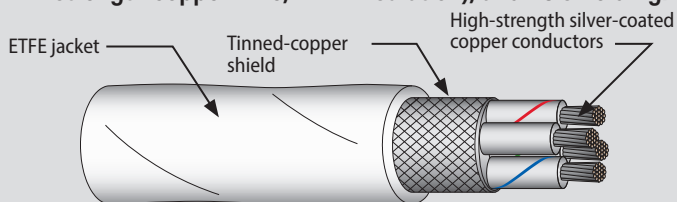

This configuration of multi-conductor GS27500 cable is built with GS22759 dash 17 inner wires: silver-plated high-strength copper wire with ETFE insulation. The cable is equipped with an overall tinned-copper EMI/RFI shield and standard fluoropolymer ETFE outer jacket. The superior mechanical properties of high-strength conductors contribute to the overall safety, reliability, and mechanical strength of the cable.

GS27500-24SC2S23

- 27500 type with GS22759-33 wire (silver-plated high-strength copper wire, XL-ETFE insulation), and silver shielding.

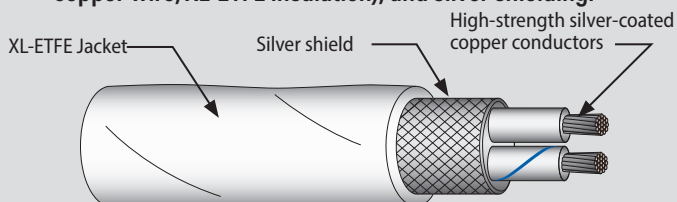

This cross-linked configuration of multi-conductor GS27500 cable is built with GS22759 type dash 33 inner wires: silver-plated high-strength copper wire with cross-linked XL-ETFE insulation. Cable is equipped with an overall silver-plated EMI/RFI shield and cross-linked XL-ETFE outer jacket. This multi-conductor 27500 type cable delivers far superior thermal stability, enhanced chemical resistance, mechanical strength, and electrical properties compared to non-crosslinked versions.

MIL-STAR GS27500 cable part numbering replaces the “M” callout with “GS.” From left to right, how to order variables begin with the color code and shield coverage variable, in this case a dash, which indicates default 85% overall shield coverage, with white inner wires and colored stripes. Code A used in this position would denote 85% shield coverage with solid colored wire, Code C would denote 90% shield coverage with white inner wires with colored stripes. The next variable, 22 in our example, is conductor size, followed by the base wire specification (TE) indicating GS22759-16 wire is to be used in this cable buildup. Final variables include the number of inner wire conductors (2), type of overall shielding (T, for Tinned Copper), and finally jacketing material (14, indicating extruded ETFE in white).

Glenair MIL-STAR GS27500 cable may also be constructed with custom inner-conductor cable striping and customer-defined laser marking.

MULTI-CONDUCTOR M27500 TYPE IAW ANSI/NEMA WC 27500							
MIL-STAR Cable Sample Part Number	GS27500	-	22	TE	2	T	14

BETTER-THAN-QPL MIL-STAR SHIELDING OPTIONS

Glenair signature braided cable shield solutions include single and double layers of metal-clad composite microfilament AmberStrand®, microfilament nickel-clad stainless steel ArmorLite™, and ArmorLite™ CF corrosion-resistant.

MIL-STAR GS27500 SHIELDING OPTIONS		
Single Shield Code	Double Shield Code	Shield Description
AM	AS	AmberStrand®, Round
AR	AL	ArmorLite™, Round
AC	AF	ArmorLite™ CF, Round
U	U	Unshielded

